




HEADLINER



R-9560 Headliner A/C Unit is designed for shuttle vans, small buses, and other applications where you need high CFM without consuming a lot of interior space, the R-9560 produces 485 CFM and better air movement than the competition.





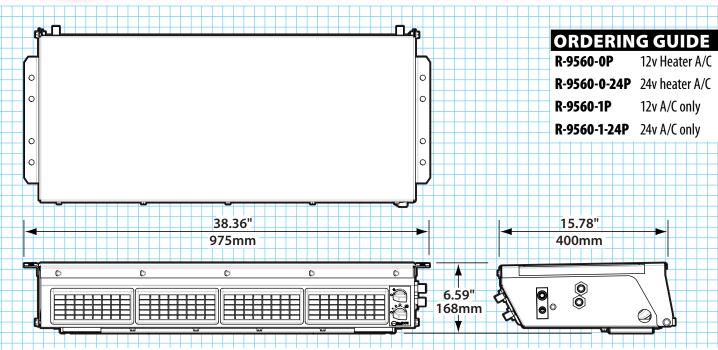

Instead of pulling air from the rear, the unit draws air from the bottom, which allows efficient airflow even when it's mounted near a back wall or some other tight location

An added benefit: a hinged bottom makes the R-9560 easy to service. You just remove the front bolts and the unit swings down for easy access to filters and other components. This feature saves time—and your technician's shoulders.

SPECIFICATIONS

BTU's Cooling – 32,500 BTU @ 100°F

(9.5kw @ 37.8°C) air temperature rise **Heating** – 38,600 BTU @ 100°F (11.3kw @ 37.8°C) air temperature rise

Air Flow 485 CFM (824 m³/h)

Weight 64lbs (29kg)

Current Draw 17.9 amps @ 13.6 VDC

9 amps @ 27.2 VDC

Controls Three speed

Optional remote mount controls are available for the R-9560 Headliner Unit:

71R5850 A/C only remote mount control (includes wire harness)



71R5851 Heat A/C remote mount control (includes wire harness and electronic water valve)



1 square = 1"