


LTR	DATE MM/DD/YY	BY	CHK'D	PROVE OUT	PROD APPR	REVISION
--	6-30-09	RMK	JBB	JLC	W	INITIAL RELEASE (ER-SIG348; EC-MFG1101)

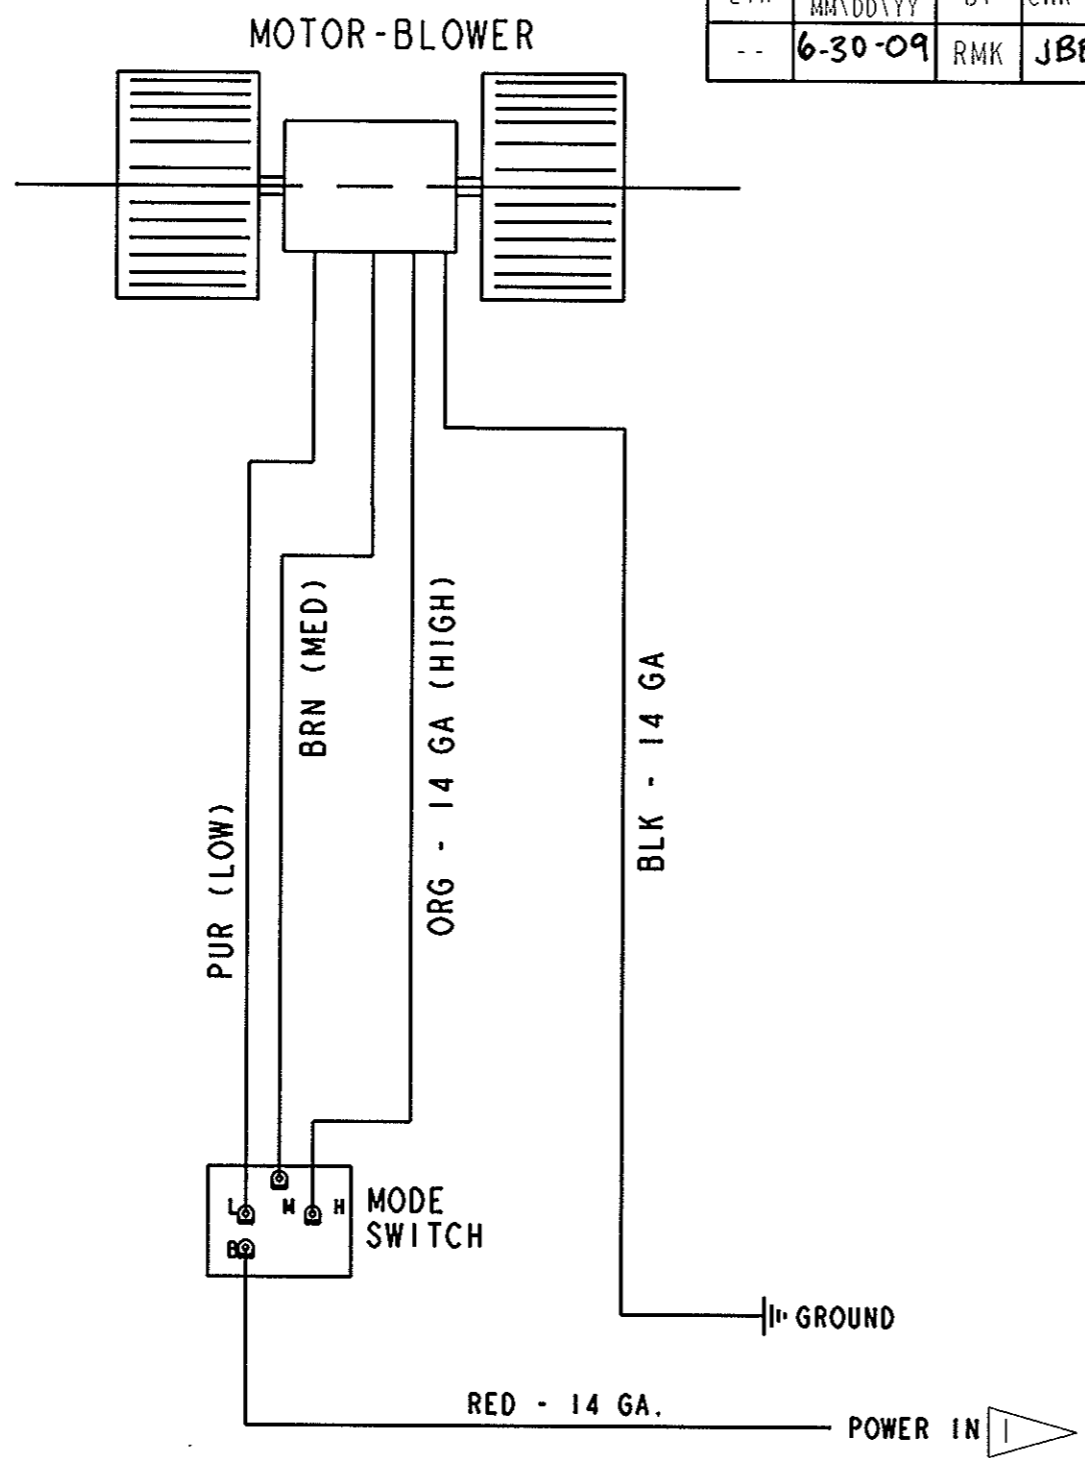

USE 15 AMP FUSE OR BREAKER FOR 24V SYSTEM (CUSTOMER SUPPLIED)  
 USE 30 AMP FUSE OR BREAKER FOR 12V SYSTEM (CUSTOMER SUPPLIED)

1) ALL WIRES ARE 16 GA UNLESS OTHERWISE SPECIFIED

NOTES:

ITEM		PART NO.	DESCRIPTION	MAT'L	FINISH
DWN	R. KROFFT	6-10-09	<b>WIRING DIAGRAM R-2300</b>		
CKD	J. BARAJAS	6-11-09			
SCALE: DRAWING SCALE					
<b>RED DOT CORPORATION</b> 495 Andover Park East Seattle, WA 98188			THIS PRINT IS PROPRIETARY INFORMATION LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO RED DOT CORPORATION		
	NEXT ASSY CUSTOMER	DWG. NUMBER <b>RD-1-3496</b>	SIZE <b>B</b>	SHEET 1 of 1	