


LTR	DATE MM\DD\YY	BY	CHK'D	PROVE OUT	PROD APPR	REVISION
--	5-7-13	JGV	TSH	--	JGV	INITIAL RELEASE; (ER-MIN5502) (EC-MFG3157)

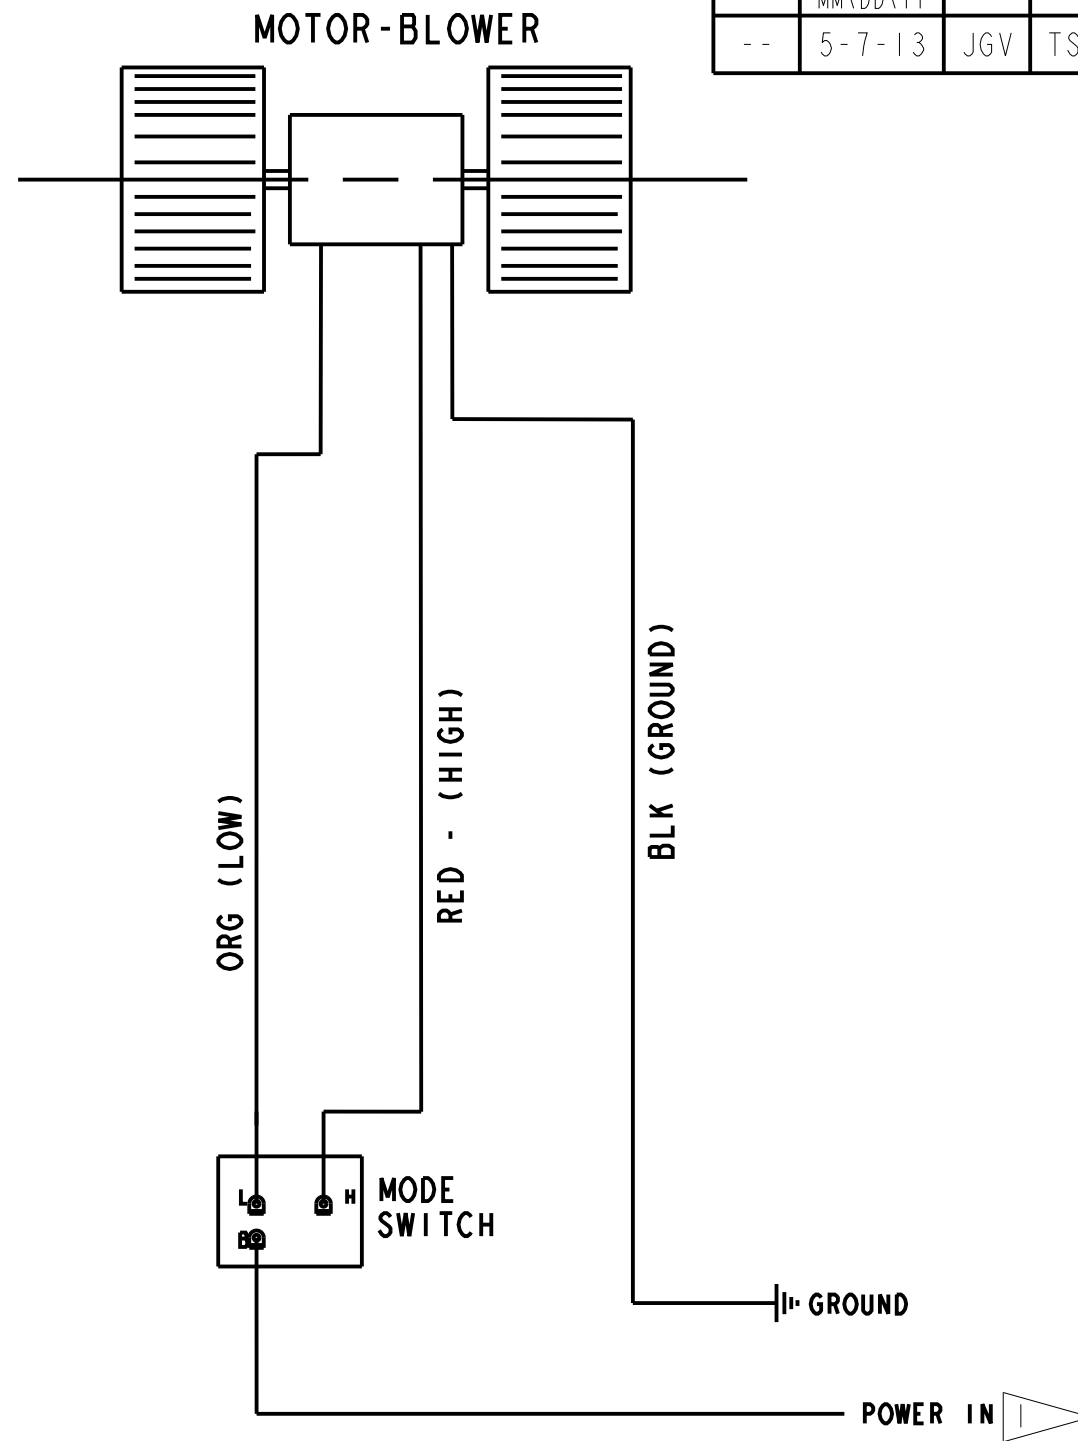

 USE 5 AMP FUSE OR BREAKER FOR 24V SYSTEM (CUSTOMER SUPPLIED)
 USE 7.5 AMP FUSE OR BREAKER FOR 12V SYSTEM (CUSTOMER SUPPLIED)

1) ALL WIRES ARE 14 GA MINIMUM UNLESS OTHERWISE SPECIFIED

NOTES:

ITEM		PART NO.	DESCRIPTION	MAT'L	FINISH
DWN	J. VOLLMEN	5-7-13	WIRING DIAGRAM R-270		
CKD	T. HELGREN	5-7-13			
SCALE: DRAWING SCALE				THIS PRINT IS PROPRIETARY INFORMATION LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO RED DOT CORPORATION	
RED DOT CORPORATION 495 Andover Park East Seattle, WA 98188			NEXT ASSY CUSTOMER	DWG. NUMBER RD-6-5974	SIZE B SHEET 1 of 1