


LTR	DATE	BY	CHK'D	REVISION
A	7-27-88	K.M.	RSG	"HIGH" SPEED WAS "LOW" SPEED

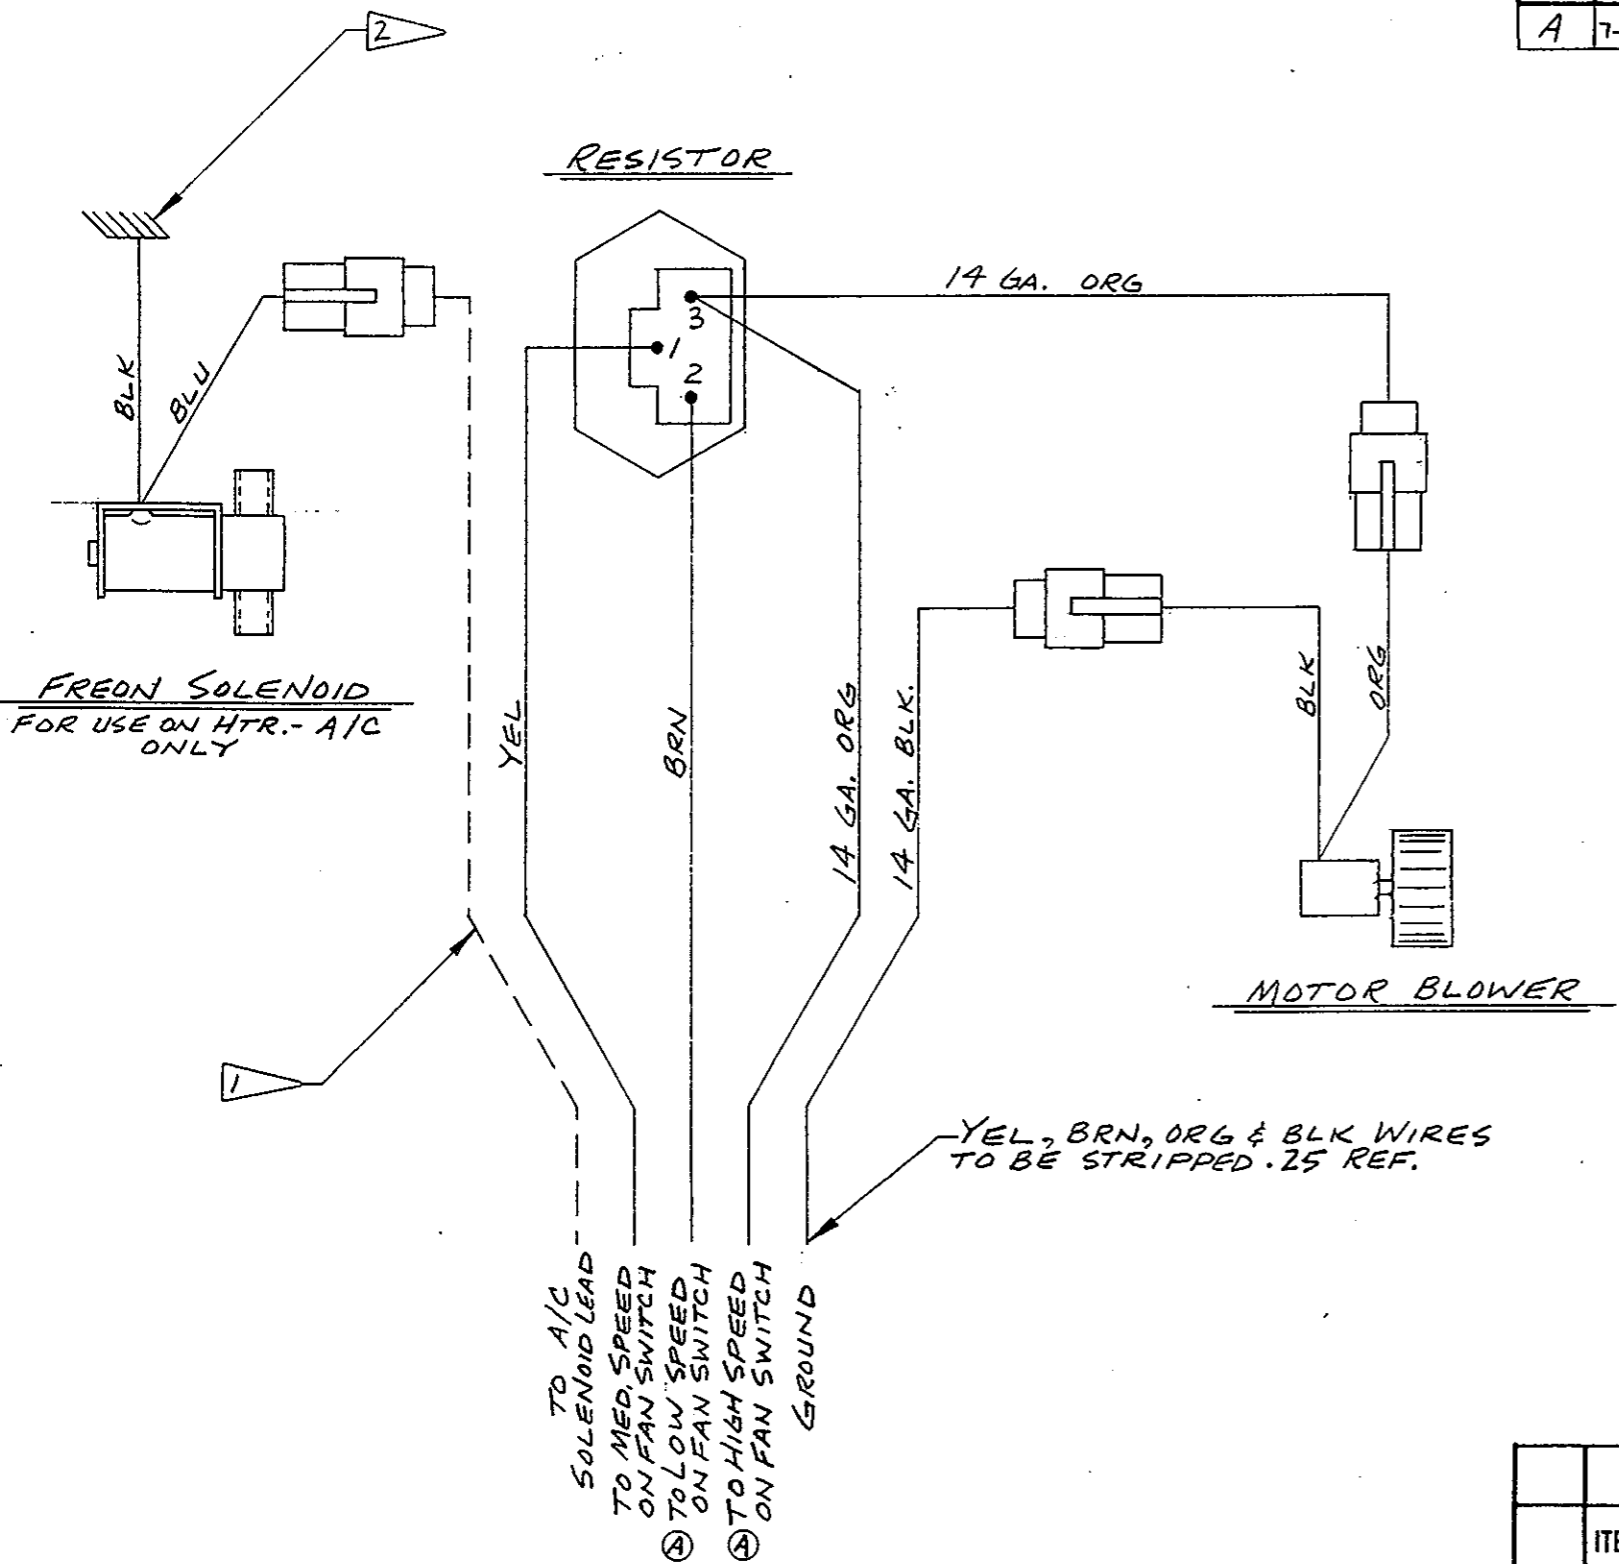

FREON SOLENOID
FOR USE ON HTR.- A/C ONLY

RESISTOR

MOTOR BLOWER

- TO A/C SOLENOID LEAD
- TO MED. SPEED ON FAN SWITCH
- TO LOW SPEED ON FAN SWITCH
- TO HIGH SPEED ON FAN SWITCH
- GROUND

YEL, BRN, ORG & BLK WIRES TO BE STRIPPED .25 REF.

- 2) ATTACH GROUND TERMINAL TO UPPER CORE RETAINER SCREW.
- 1) CUSTOMER SUPPLIED
- 2) FOR POWER IN, USE 20 AMP FUSE OR BREAKER (CUSTOMER SUPPLIED)
- 1) ALL WIRE IS 16 GA. SXL EXCEPT AS SHOWN.

NOTE:

ITEM	PART NO.	DESCRIPTION	MAT'L	FINISH	
DWN	K. McCLUNG 3-9-88	<u>WIRING DIAGRAM</u> <u>R-4122</u>			
CKD	GREENWOOD 3-29-88				
SCALE NONE					
RED DOT CORPORATION 495 Andover Park East Seattle, WA 98188		THIS PRINT IS LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO RED DOT CORPORATION.	NEXT ASSEMBLY CUSTOMER	DWG. NUMBER RD-3-4741	SHEET 1 OF 1